



FDM-66MN Miniature OEM Tri-Band Digital IP & Serial Control Data Link





Introduction


- FDM-66MN is a wireless transmission product designed by IWAVE based on mature SOC chipset, which is a strong NLOS ability radio offering full duplex TCPIP/UDP data and control TTL data communication.
- FDM-66MN is designed based on TD-LTE wireless communication standard. It doesn't rely on any carrier's base station.
- Supports Ethernet and full duplex TTL data transmission. And the control data transmission is higher priority than the network signal.
- It adopt the automatic frequency hopping technology(FHSS) for anti-interference greatly reduce system power consumption and size of the module.
- Support point to point and point to multiple point
- Support obtain serial port information via IP
- 3*Ethernet port for integration various terminals
- Wide voltage input: DV5-32V
- Low latency IP communication
- Support WEBUI/API/Management software for network management and parameters configurable.



Core Technology of Digital Transmission Scheme

- Access authentication to prevent illegal access
- Support user-defined encryption
- Band scanning to avoid interference
- Cross-band frequency hopping reduces interference effects

- OFDMA
- TDD
- 64QAM、16QAM、QPSK


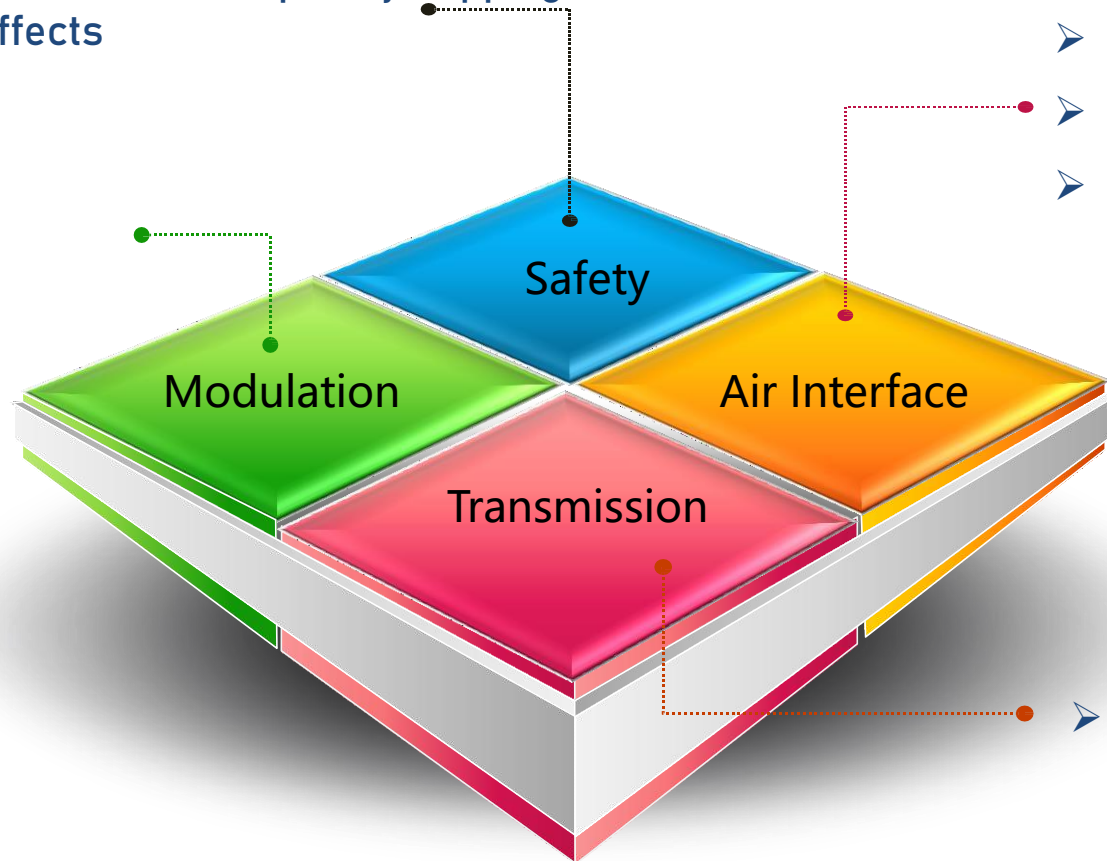


- 800MHz/1.4GHz/2.4GHz for option
- Bandwidth: 5/10/20Mhz
- Support frequency/rf power/appearance customized design


- 30Mbps data rate



Interface Definition

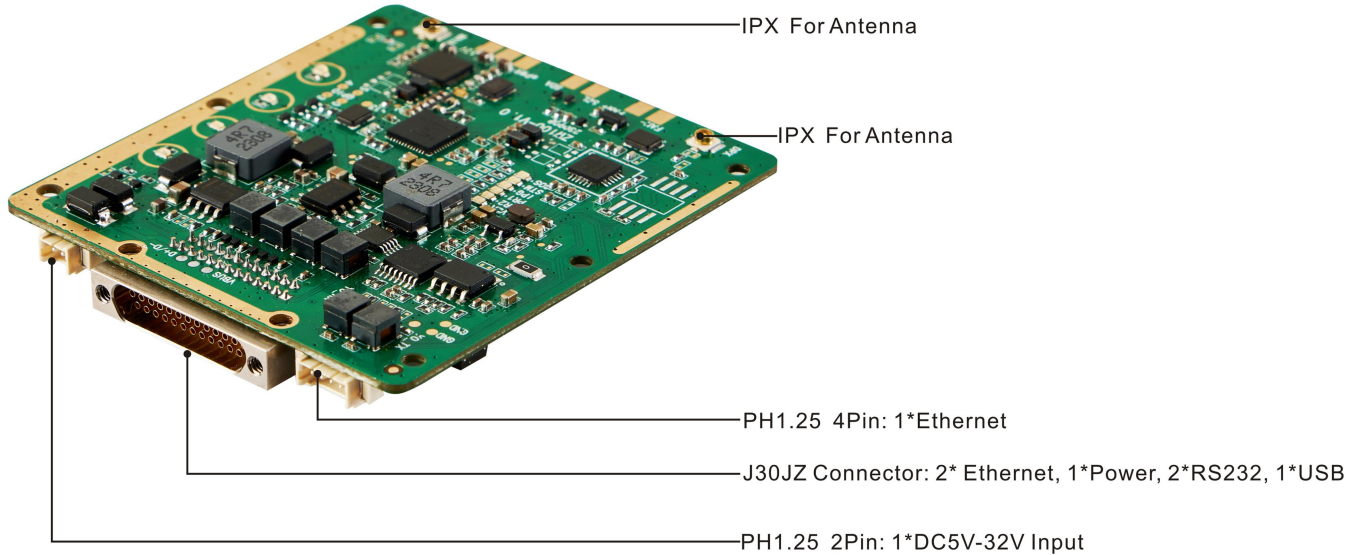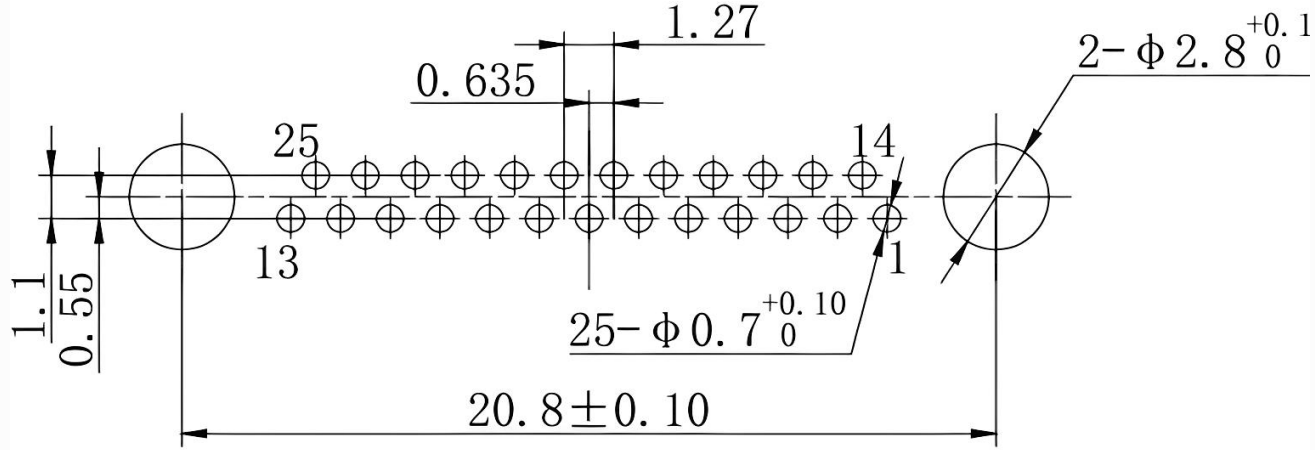

Pin	Name	Pin	Name
1	TX0+	14	RX0+
2	TX0-	15	RX0-
3	GND	16	RS232_TX
4	TX4-	17	RS232_RX
5	TX4+	18	COM_TX
6	RX-	19	COM_RX
7	RX+	20	UART0_TX
8	GND	21	UART0_RX
9	VBUS	22	BOOT
10	D+	23	VBAT
11	D-	24	GND
12	GND	25	DC VIN
13	DC VIN		

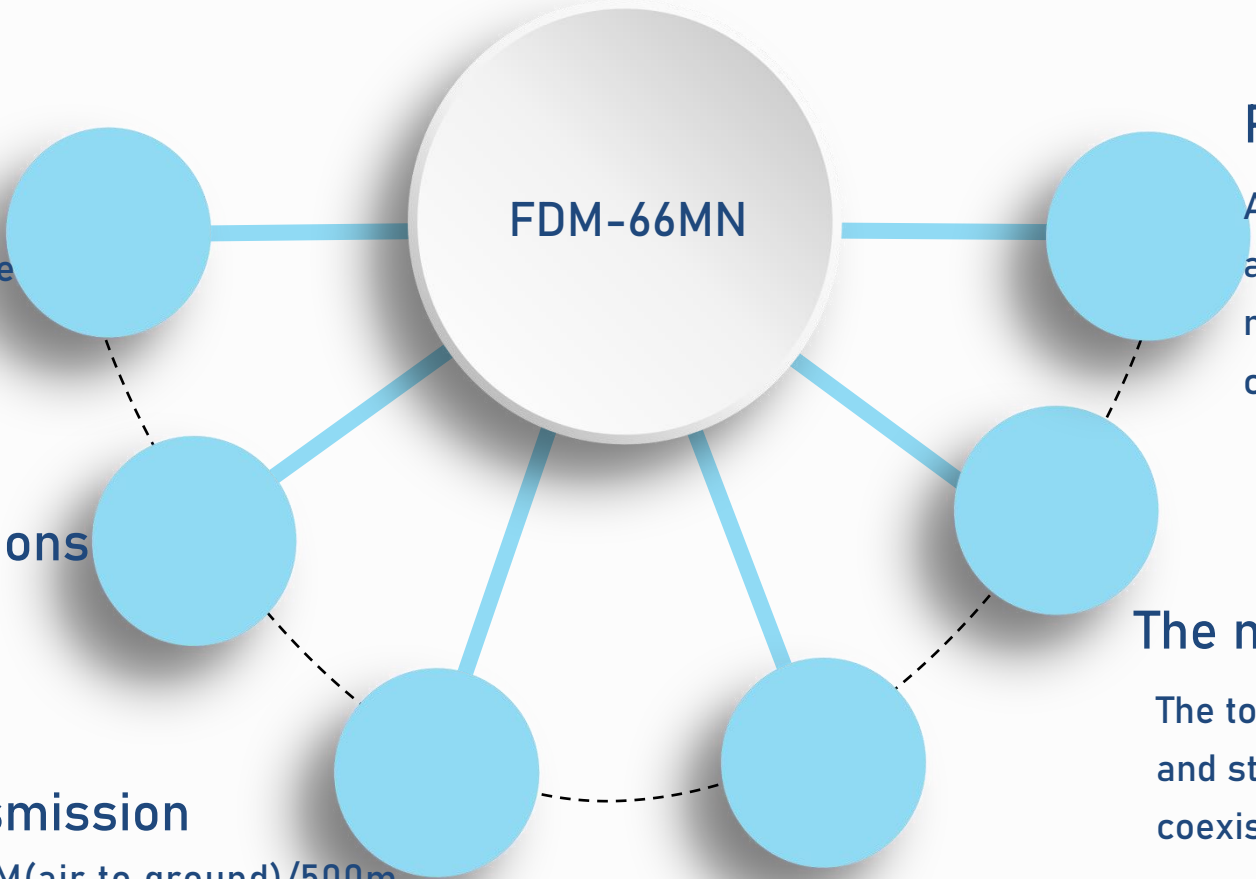

Support 17 nodes
Any node can freely communicate

Diverse bandwidth options
1.4M/3M/5M/10M/20Mhz

Long Distance Transmission
One hop distance up to 17KM(air to ground)/500m-3KM(NLOS ground to ground)

Power Adaptive
According to the channel conditions, adaptively adjust the transmitting and receiving power to reduce power consumption and network interference

The network topology is variable
The topology can be switched between linear and star topologies or multiple topologies coexisting

Intelligent routing
The network automatically switches routes based on factors such as the number of transceiving and channel environment.



Technical Specification



General			Wireless		
Technology	Wireless base on TD-LTE Wireless technology standard		Communication Mode	unicast, multicast, broadcast	
Encryption	ZUC/SNOW3G/AES128		Transmission Mode	Full duplex communication between nodes	
Date Rate	Peak rate	Max 45Mbps shared data rate for uplink and downlink. One-direction data rate up to 36Mbps (8Mbps in the other direction)	Networking Mode	Star topology networking	
	Speed level	Adaptive allocation rate	Access mode	Multiple slave nodes are powered on and access the network at the same time	
	Up-down ratio	2D3U/3D2U/D1U/1D4U			
	Speed limit	Support users to set speed limit	Network Control	State Monitoring	Connection status /rsrp/ snr/distance/up & downlink throughput rates
Communication Range	15-20km(Air to ground) 500m-3km(NLOS Ground to ground)		System Management	WATCHDOG: all system-level exceptions can be identified, automatic reset	
Node	17nodes		Re-transmission	HARQ retransmission	
Bandwidth	1.4MHz/3MHz/5MHz/10MHz/20MHz		Data Link	Dynamically adjust the rate based on wireless data	
RF Power	25dBm±2		Time Synchronization	Self-synchronizing, independent of external clock	
Power Control	Automatic power control	Adaptive control the transmitting power	Latency	Air Interface	Single hop transmission delay<=30ms
	Constant Power	Yes		Transmission delay	8 nodes, serial 7 hops, one-way<500ms(depends on working environment)
Adaptive Modulation	QPSK, 16QAM, 64QAM			Boot delay	<15s
Anti-Jam	FHSS, frequency hopping cross-band or within band			Shutdown delay	<10s
Frequency Band			Systems Control	Parameter Configuration	Transmit power/frequency/bandwidth (real-time change), frequency band (non-real-time change)
1.4Ghz	1428-1468MHz			Status/Parameter Reporting	Connection status/rsrp/snr/distance/uplink and downlink throughput rates, etc.
800Mhz	806-826 MHz			Configuration & Management	WebUI/ Management software /API/ Serial Port
2.4Ghz	2402-2481 MHz				



Technical Specification



Environment			Physical		
Storage Temperature	-40°C~+85°C		Interface	J30JZ Connector	2*Ethernet port
Working Temperature	-20°C~+70°C				2*RS232
Humidity	5%~95%				1*Power Input
Power				PH1.25 4Pin	1*Ethernet
Power Input	DC5V-32V	Power Input		RF Connector	2*IPX
Average Power Consumption	5W	Average Power Consumption		PH1.25 2Pin	2*Power Input
Max Power Consumption	8W	Max Power Consumption	Dimension	60*55*5.7mm	
Max Transmitting Power	25±2dBm		Weight	26g	
Heat Dissipation					
● Continuous working of the FD-61MN requires a heat dissipation treatment					
● Adding a cooling aluminum sheet or fan for heat dissipation					
● The heat dissipation design can be evaluated according to 5Watts					



Sensitivity



Receiver Sensitivity(Access state)			Sensitivity(BLER≤3%)(Data transmission state)					
1.4GHZ	20Mhz	-100dBm	1.4Ghz	10MHz	-91dBm(10Mbps)	2.4Ghz	20Mhz	-94dBm(10Mbps)
	10MHZ	-103dBm		10MHz	-96dBm(5Mbps)		20Mhz	-97dBm(5Mbps)
	5MHZ	-104dBm		5MHz	-82dBm(10Mbps)		10Mhz	-91dBm(10Mbps)
	3MHZ	-106dBm		5MHz	-91dBm(5Mbps)		10Mhz	-96dBm(5Mbps)
800MHZ	20Mhz	-100dBm		3MHz	-86dBm(5Mbps)		5Mhz	-84dBm(10Mbps)
	10MHZ	-103dBm		3MHz	-97dBm(2Mbps)		5Mhz	-93dBm(5Mbps)
	5MHZ	-104dBm		2MHz	-84dBm(2Mbps)		3Mhz	-87dBm(5Mbps)
	3MHZ	-106dBm		10MHz	-91dBm(10Mbps)		3Mhz	-98dBm(2Mbps)
2.4GHZ	20Mhz	-99dBm	800Mhz	10MHz	-97dBm(5Mbps)	1.4Ghz	-84dBm(2Mbps)	
	10MHZ	-103dBm		5MHz	-84dBm(10Mbps)			
	5MHZ	-104dBm		5MHz	-94dBm(5Mbps)			
	3MHZ	-106dBm		3MHz	-87dBm(5Mbps)			
				3MHz	-98dBm(2Mbps)			
				2MHz	-84dBm(2Mbps)			



Control Data Transmission



Command Interface	AT command configuration	API/HTTP/UART for AT command configuration
Configuration Management	Support configuration via WEBUI, API, and management software	
Working Mode	TCP server mode TCP client mode UDP mode UDP multicast MQTT Modbus	<ul style="list-style-type: none">● When set as a TCP server, the serial port server waits for computer connection.● When set as a TCP client, the serial port server actively initiates a connection to the network server specified by the destination IP.● TCP server, TCP client, UDP, UDP multicast, TCP server/client coexistence, MQTT
Baud rate	1200, 2400, 4800, 7200, 9600, 14400, 19200, 28800, 38400, 57600, 76800, 115200, 230400, 460800	
Protocol	ETHERNET, IP, TCP, UDP, HTTP, ARP, ICMP, DHCP, DNS, MQTT, Modbus TCP, DLT/645, Pass-through mode	
System Management	Supports WATCHDOG function, all system-level exceptions can be identified and automatically reset	



Robot Mobile Communication



- Drone/robot collaborative networking
- Stable/real-time/long-distance communication for swarm unmanned system
- Star topology networking
- HD video transmission for NLOS/LOS





Intelliengtly Fast Linking for You

This document is copyright-protected by IWAVE COMMUNICATIONS CO., LTD.

The information in this document may contain predictive statements including, without limitation, statements regarding the future and operating results, future product portfolio, new technology, etc. There aer a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. IWAVE may change the information at any time without notice.

IWAVE COMMUNICATIONS CO., LTD
Address: 13F, No.400 Caobao Road, Xuhui District, Shanghai, China
M: +8613590103309
Web: www.iwavecomms.com